



# Motorola Razr V3c Camera (CDMA) Replacement

Written By: Joshua Ruehlig



## INTRODUCTION

This guide will show you how to remove and replace the camera for a Motorola V3c.

---

### **TOOLS:**

- [Spudger](#) (1)
  - [T5 Torx Screwdriver](#) (1)
-

## Step 1 — Upper Casing (CDMA)



- Remove the four rubber-like pieces from all corners of the surrounding area that border the screen.

## Step 2




- Using a T4 screwdriver, carefully unscrew all four screws on the outer screen. Be sure that you do not strip or damage the screws.





## Step 3



- Carefully pry the screen open using a plastic spudger.

 Pry slowly, as too much bending will crack the screen. There are also two fragile ribbon cables that connect the screen and camera to the phone.



## Step 4

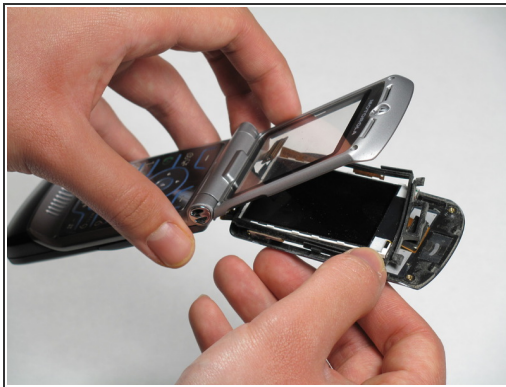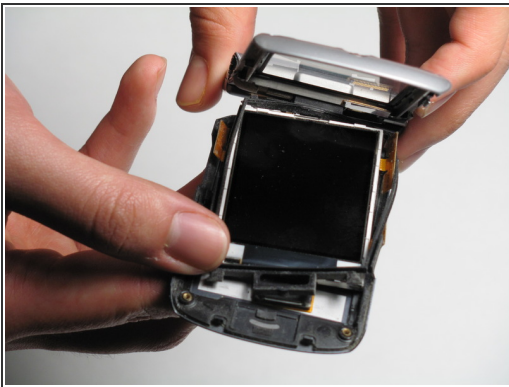

- Take the screen housing off from the casing.

 Watch for small pieces falling out from the screen during this step. Keep track of these pieces.


## Step 5 — Camera (CDMA)

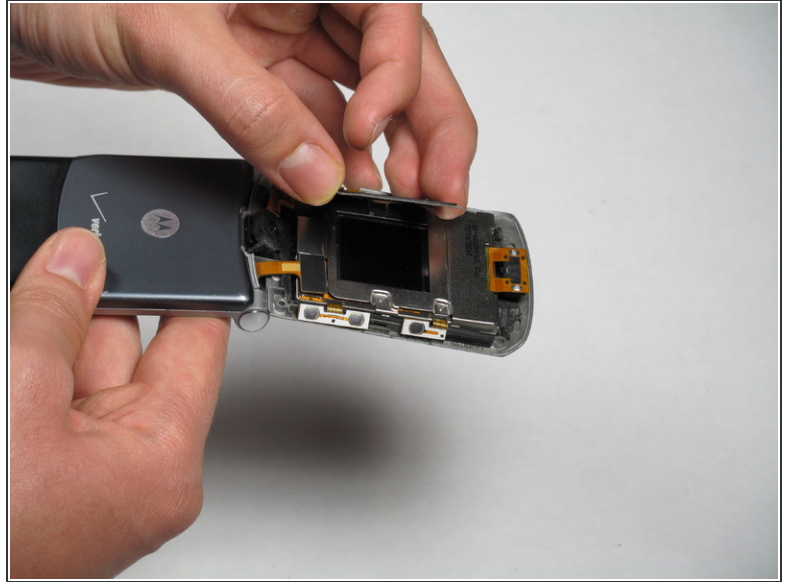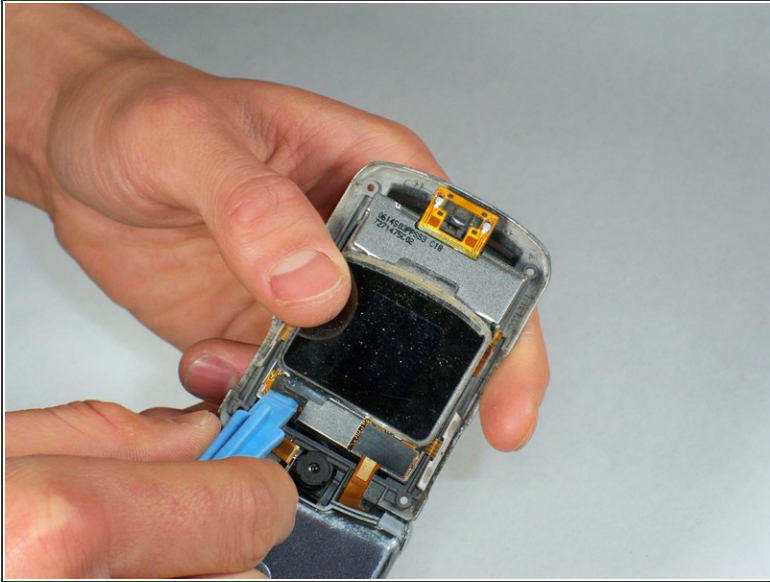

- Pry screen cover off with plastic spudger

**i** The screen cover has some adhesive holding it to the screen


## Step 6

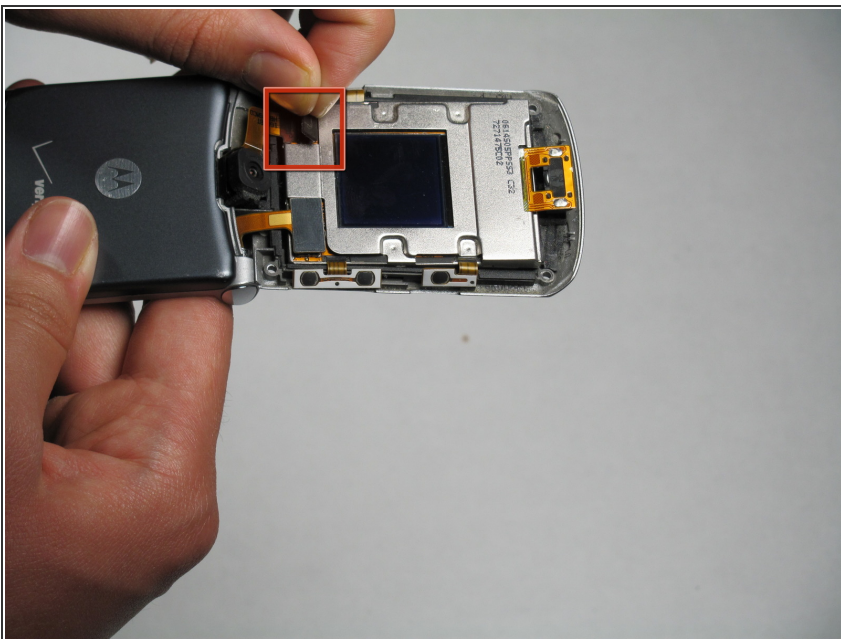

- Remove small black sticker covering the camera ribbon connector




## Step 7

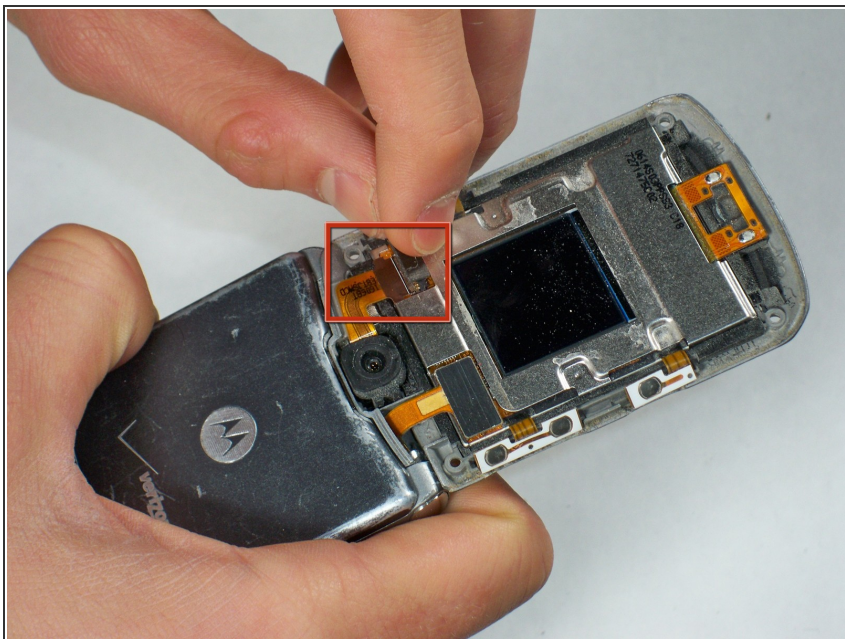

- Flip over small hinge that cover the camera ribbon connection

## Step 8

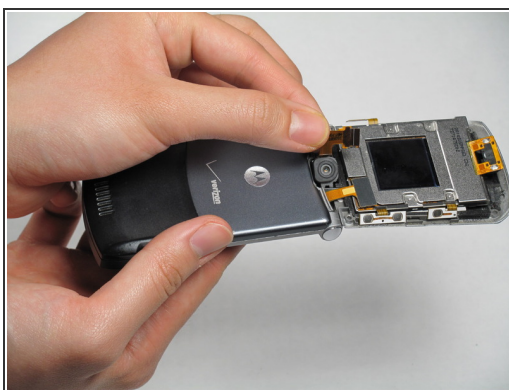

- Pull off the rubber camera cover and camera
- ⓘ The camera and camera cover may come off separately or together

This document was last generated on 2017-10-03 05:26:24 PM.